


Model 89

TOP-GUIDED AND SINGLE SEATED GLOBE VALVES

Model 89 globe valves provide topguided and single seated structure with simple stream-lined body for high flow capacity and are designed to meet various service process control requirements such as high viscosity flow or slurry flow etc. in a wide range of related industries.

Together with compactly designed multispring diaphragm actuator, Model No.89 globe valves provide stable control performance with high thrust power.

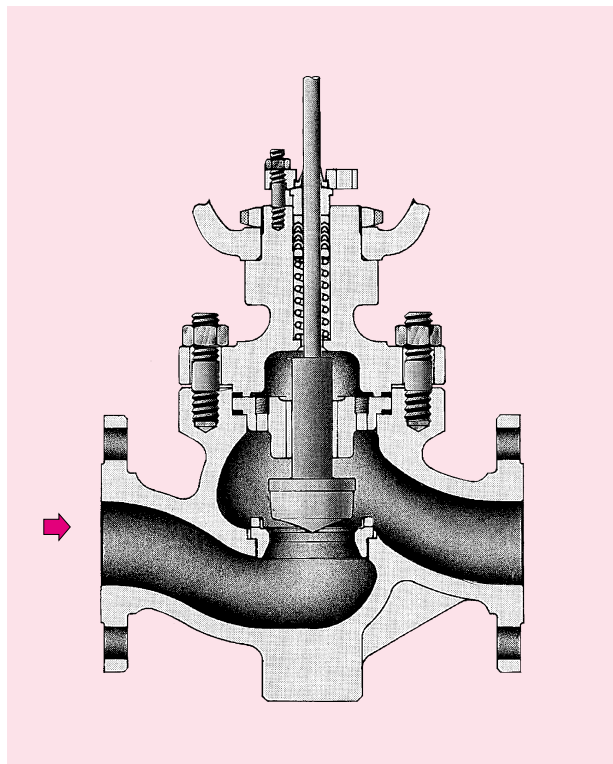

89

1. SPECIFICATIONS

Valve Type		Diaphragm operated control valve											
Valve Model No.		3889, 2889											
VALVE BODY	Body Type	Model 89 Globe type											
	Valve Sizes	(mm)	15	20	25	40	50	65	80	100	125	150	200
		(in.)	1/2	3/4	1	1 1/2	2	2 1/2	3	4	5	6	8
	Pressure Rating	JIS 10K, 20K, 30K, 40K, ANSI/JPI Class 150, 300, 400, 600											
	End Connections	Flanged end : FF, RF, RJ, Male and female, Tongue and groove (※ Welding end : SW, BW)											
	Body Materials	SCPH2, SCS13A, SCS14A											
	Bonnet Types	Plain Bonnet (- 17 < T ≤ 230 °C) Extension Type F (- 45 ≤ T < - 17 °C , 230 < T ≤ 550 °C) Extension Type H (- 196 ≤ T < - 45 °C)											
		Bellows seal (See page 4 4)											
	Gland Type	Bolted gland											
	Packing (Non Asbestos)	PTFE V-ring, Braided packing, Molded packing.											
	Gaskets (Non Asbestos)	Serrated gasket, Spiral wound gasket											
	Guiding	Top guide											
	Valve Plug Action	Push-down close											
	Seat Type	Single seated											
	Valve Plug Shapes	Contoured plug (P), Quick opening (Q)											
Plug Characteristics	Equal percentage, Linear, Quick opening												
Trim Materials	SUS 316, SUS 304												
Treatment of Trim	See page 3 "Main Materials"												

ACTUATOR	Actuator Type	Model 3800 Multi-spring type single acting diaphragm actuator				Model 2800 Spring type single acting diaphragm actuator		
	Actuator Sizes	N24	N28	N33S	N40	500S	650S	
	Max. Stroke(mm)	25	38	38	65	65	65	
	Supply Air Press. kPa(kgf/cm²G)	120(1.2), 240(2.4),280(2.8),300(3.0), 400(4.0)				120(1.2), 240(2.4),280(2.8)		
	Spring Range kPa(kgf/cm²G)	20 ~ 100(0.2 ~ 1.0), 40 ~ 200(0.4 ~ 2.0) 80 ~ 200(0.8 ~ 2.0), 120 ~ 280(1.2 ~ 2.8)				20 ~ 100(0.2 ~ 1.0) 40 ~ 200(0.4 ~ 2.0) 60 ~ 220(0.6 ~ 2.2) 80 ~ 240(0.8 ~ 2.4) 100 ~ 220(1.0 ~ 2.2)		
	Action	Direct action, Reverse action						
	Materials	(Diaphragm)Cloth reinforced chloroprene rubber, (Yoke)FC200						
	Air Connection	Rc 1/4, Rc 3/8 (only for 650 S)						
	Ambient Temperature	- 20 ~ + 70 °C (- 50 ~ - 20 °C, + 70 ~ + 100 °C)*				- 30 ~ + 70 °C (- 50 ~ - 30 °C, + 70 ~ + 100 °C)*		
Painting Color	Silver, No painting on stainless steel							
VALVE CHARACTERISTICS AND PERFORMANCE	Control Mode	Throttling control, On-Off						
	Valve Action	Direct action (Air-to close), Reverse action (Air-to open)						
	Available Max. Pressure	9.8MPaG(100kgf/cm ² G) or less (Pressure limit shall conform to the standard of material & pressure temperature rating)						
	Available Temperature	- 196 °C ~ + 550 °C(Temperature limit shall conform to the standard of material & pressure temperature rating)						
	Allowable Differential Press.	See page 7 "Allowable Shut-off Pressure"						
	Rated Cv Value	See page 5 "Rated Cv Value"						
	Flow Characteristics	See page 5 "Flow Characteristics"						
	Inherent Rangeability	Standard 50 : 1 High-Range 100 : 1 (6mm,7mm only)						
	Allowable Seat Leakage Rate	Metal Seat	Contoured Plug	0.01% of rated Cv (ANSI/FCI Class IV)			Tight Shut Off (TSO)* (Valve size)(% of rated Cv) 25mm or less ... 0.0001% 100mm or less ... 0.001% 200mm or less ... 0.002%	ANSI/FCI Class V*
			Quick Opening	(Valve size)(% of rated Cv) 25mm or less ... 0.0001% 100mm or less ... 0.001% 200mm or less ... 0.002%				
	Soft Seat	Contoured Plug	ANSI/FCI Class VI					
			Quick Opening					
	Function Accuracy	Plain Bonnet	Hysteresis Error (With positioner)	Max. 1 % F.S. ... PTFE V-ring		Max. 2% F.S. ... Other Gland Packing		
Linearity (With positioner)			Max. ± 1 % F.S. ... PTFE V-ring		Max. ± 2% F.S. ... Other Gland Packing			
Bellows Seal Bonnet		Hysteresis Error (With positioner)	Max. 1.5% F.S. ... PTFE V-ring		Max. 2% F.S. ... Other Gland Packing			
		Linearity (With positioner)	Max. ± 1.5% F.S. ... PTFE V-ring		Max. ± 2% F.S. ... Other Gland Packing			
OPTIONS*	Valve Body	Drain plug, Special treatment to trim, Jacketed body						
	Actuator	Handwheel (Top-mounted or Side-mounted). Travel stop. Diaphragm material:Ethylene propylene rubber. Yoke material:SCPH2						
	Accessories	Pneumatic valve positioner(PA92A), Electro-pneumatic valve positioner(EA90A, EA91A, EA10S), Air filter regulator(MR 2000), Limit switch, Solenoid valve, Booster relay, Speed controller, Lock up valve, Pneumatic operated valve.						
	Others	The high pressure gas safety law certification, Oil free, Water free, Sandproof, Dustproof, Anti-salt damage, Vacuum service, Cold district spec, Tropical district spec, External exposure Bolts & Nuts S.S., Optional painting color.						

[Notes] (1) ※ Manufactured and mounted as option on customer's request.
 (2) Jacketed body is available for body rating 300LB and less.

2. MAIN MATERIALS




1 Typical Combination of Materials

Parts Name		Materials		
Body, Bonnet		SCPH2 (ASTM A216 WCB)	SCS13A (ASTM A351 CF8)	SCS14A (ASTM A351 CF8M)
Trim	Seat Ring Valve Plug	Valve size ≤ 80mm : SUS316 Valve size ≤ 100mm : SUS304		SUS316
	Valve Stem	SUS316		
	Guide Bushing	SUS630		SUS316
Stud Bolts & Nuts	10K, 20K, 30K 150, 300	SNB7/S45C(H)	SUS304/SUS304	
	40K 400, 600	SNB7/S45C(H)	A193 GrB8 CL2/SUS304	

- 【Notes】 (1) This table shows typical combination of materials. The combination may be subject to change by pressure, temperature and kind of fluid.
 (2) Trim materials may be used casting instead of bar materials.
 (3) Bonnet may be forged in some cases.


2 Pressure and Temperature Range for Stellite Hard Facing on Trim

- A : No Stellite is required B : Stellite seat C : Stellite face
 D : Stellite face + stellite on guide bushing and guide post
 E : Stellite seat + stellite on guide bushing and guide post

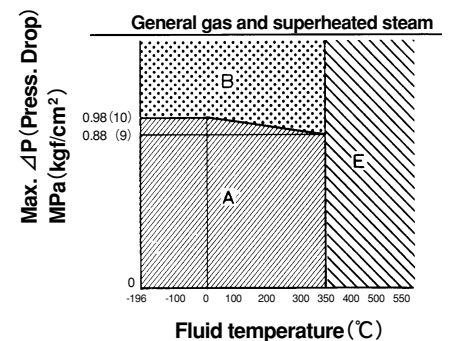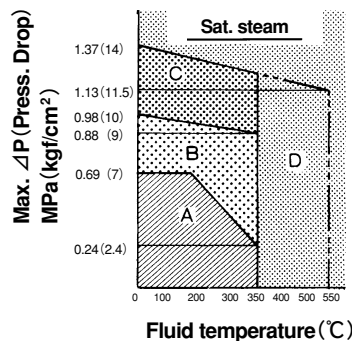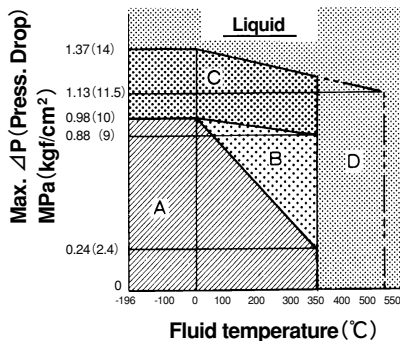

- (1) Stellite seat or higher surface treatment is required for ON-OFF and Tight-shut-off(TSO) valves.
- (2) SUS440B Trim material is suitable for flashing or cavitation conditions or saturated steam, in range of temperature from - 20 to 400 °C.
- (3) Irrespective of service fluid, when the temperature is 350 °C and over, guide bushing and guide post shall be made stellite hard facing treatment.
- (4) For saturated steam with inlet pressure of 0.69MPaG(7kg/cm²G) and over, stellite seat or better surface treatment is required.
- (5) For liquid service with shut-off pressure exceeding 1.37MPaG(14kg/cm²G), stellite seat or better treatment is required.


3 Pressure and Temperature Range of Soft Disc

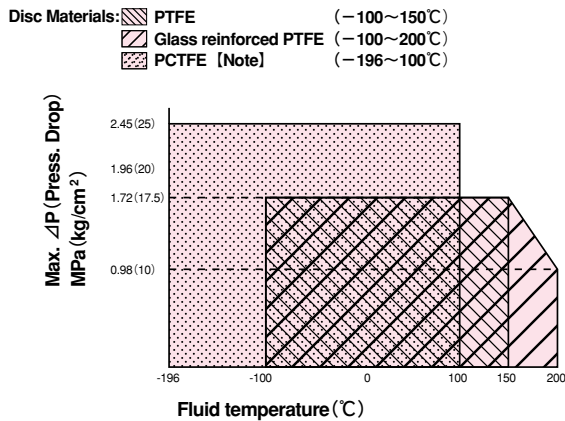

[Note] Polychlorotrifluoroethylene

4 Pressure and Temperature Range of Bellows Seal Bonnet

Bellows Material : SUS 316L

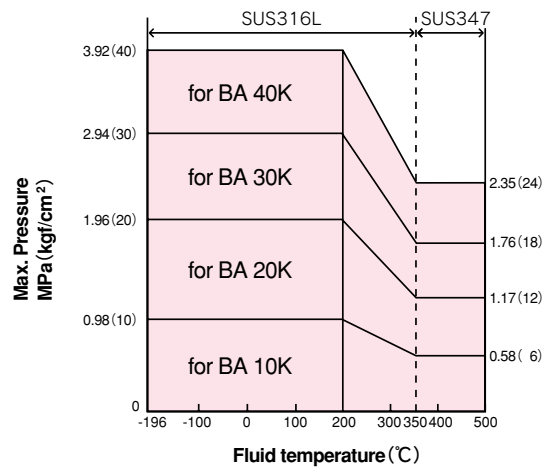

3. SCOPE OF PRODUCTION

1 Combination of Valve Body and Actuator

Valve Model		3889				2889	
Actuator Size		N24	N28	N33S	N40	500S	650S
Valve Size							
15 (mm)	1/2 (in.)	●	●	●			
20	3/4	●	●	●			
25	1	●	●	●			
40	1 1/2	●	●	●	●	●	
50	2	●	●	●	●	●	
65	2 1/2		●	●	●	●	
80	3		●	●	●	●	●
100	4		●	●	●	●	●
125	5				●	●	●
150	6				●	●	●
200	8				●	●	●

2 Scope of Port

Metal Seat · Contoured plug

Port Sizes		mm	φ4	6	7	8	10	15	20	25	32	40	50	65	80	100	125	150	200
Rated Travel (mm)		in.	—	1/8	3/16	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	6	8
Valve Size			15							20		25	38			50		65	
15 (mm)	1/2 (in.)		◆	◆	◆	◆	◆	◆	●										
20	3/4		◆	◆	◆	◆	◆	◆	●										
25	1		◆	◆	◆	◆	◆	◆	●										
40	1 1/2		◆	◆	◆	◆	◆	◆	◆	◆	◆	●							
50	2						◆	◆	◆	◆	◆	◆	●						
65	2 1/2								◆	◆	◆	◆	◆	●					
80	3									◆	◆	◆	◆	◆	●				
100	4											◆	◆	◆	◆	●			
125	5												◆	◆	◆	◆	●		
150	6													◆	◆	◆	◆	●	
200	8														◆	◆	◆	◆	●

- [Notes] (1) ● : Full port, ◆ : Reduced port
 (2) Rated travel shall be determined in accordance with port size, irrespective of valve size.
 (3) PCTFE is used for resilient seat material of port size 3/8 inch (10 mm) and under.
 (4) For quick-opening service, only full port is available for valve size 1 1/2 inch and over except 1 1/2 inch × 1 1/4 inch. For valve size 1 inch and less, reduced port up to 1/4 inch is available.

4. FLOW CHARACTERISTICS


1 Rated Cv Value

Port size	mm	4	6	7	8	10	15	20	25	32	40	50	65	80	100	125	150	200	
	in.	—	1/8	3/16	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	6	8	
Rated Travel(mm)		15									20		25	38			50		65
Rated Cv Value	Contoured	0.15	0.4	0.8	1.5	3.0	5.2	9	16	22	32	52	85	125	205	300	420	640	
	Quick opening	—	—	—	2.0	3.5	6	10	18	25	40	60	90	135	220	350	460	800	
Inherent Rangeability(Eq%)		50:1	100:1		50:1														
Inherent Rangeability(Lin)		30:1	50:1																


[Notes] (1) High rangeability is applicable for port size 4 mm ~ 7 mm with equal percentage plug.
 (2) Rangeability 100 : 1 is available on request for port size 1/4 inch ~ 3 inch with equal percentage plug.

2 Flow Characteristics

■ Contoured plug Equal percentage(P)

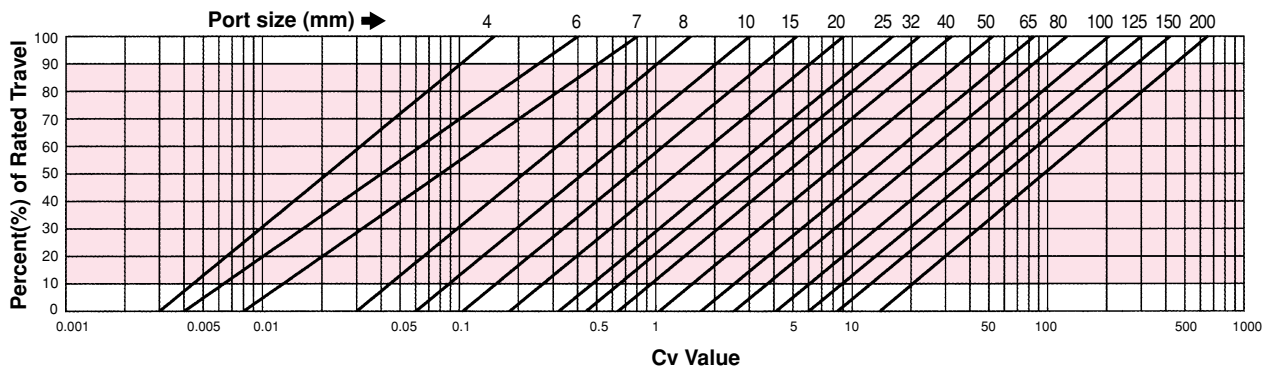

■ Contoured plug Equal percentage(P)
Rangeability 100 : 1

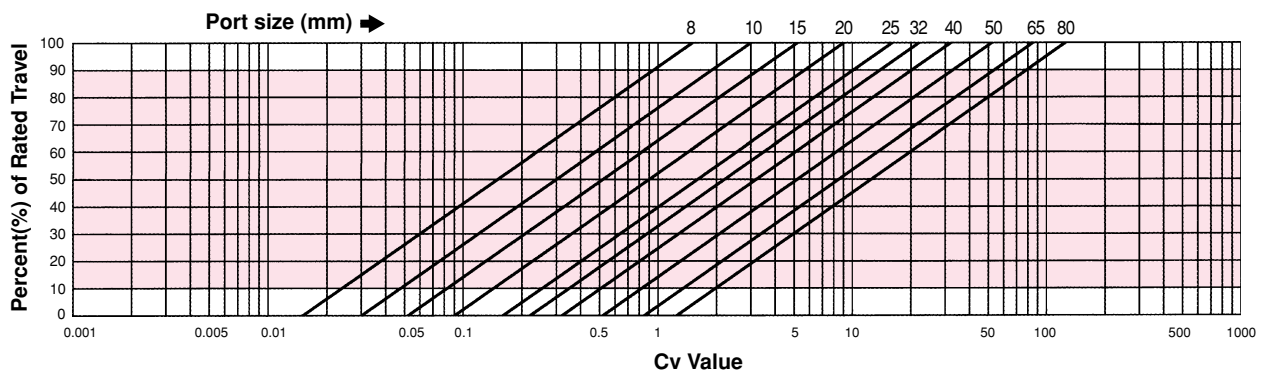

[Note] Shaded zone represents proper throttling control range.

[Note] If micro-flow control Cv is required, Model 3306 is recommended.

Model No.	3306-M										3306-L				
Rangeability	500 : 1										50 : 1				
Rated Cv	0.0005	0.001	0.002	0.005	0.01	0.02	0.05	0.1	0.15	0.02	0.05	0.1	0.15	0.2	0.4
Flow Characteristics	Modified Eq%										Linear				

See Catalogue No. MCE-B 1601 for details.

5. ALLOWABLE DIFFERENTIAL PRESSURE

1 Off-balance Classification

Unit : kPaG(kg/cm²G)

Action			Spring Range		Supply Air Pressure	Off-balance	Positioner	
			Actuator Size					
			N24 ~ N40	500, 650				
Contoured Plug	Direct Action		20 ~ 100(0.2 ~ 1.0)		120(1.2)	20(0.2)	without	
			40 ~ 200(0.4 ~ 2.0)		240(2.4)	40(0.4)	with	
			—	60 ~ 220(0.6 ~ 2.2)	280(2.8)	60(0.6)		
			40 ~ 200(0.4 ~ 2.0)	40 ~ 200(0.4 ~ 2.0)	280(2.8)	80(0.8)		
			—	—	300(3.0)	100(1.0)		
	—	—	280(2.8)	100(1.0)	with			
	—	20 ~ 180(0.2 ~ 1.8)	400(4.0)	120(1.2)				
	Reverse Action		20 ~ 100(0.2 ~ 1.0)			120(1.2)	20(0.2)	without
			40 ~ 200(0.4 ~ 2.0)			240(2.4)	40(0.4)	with
			—	60 ~ 220(0.6 ~ 2.2)		280(2.8)	60(0.6)	
80 ~ 200(0.8 ~ 2.0)			80 ~ 240(0.8 ~ 2.4)	280(2.8)	80(0.8)			
—			100 ~ 220(1.0 ~ 2.2)	280(2.8)	100(1.0)			
—	—	400(4.0)	120(1.2)	with				
—	—	280(2.8)	100(1.0)					
Quick Opening	Direct Action		40 ~ 200(0.4 ~ 2.0)		240(2.4)	40(0.4)	with	
			—		60 ~ 220(0.6 ~ 2.2)	280(2.8)		60(0.6)
			40 ~ 200(0.4 ~ 2.0)		40 ~ 200(0.4 ~ 2.0)	280(2.8)		80(0.8)
			—	—	300(3.0)	100(1.0)		
			—	20 ~ 180(0.2 ~ 1.8)	280(2.8)	100(1.0)		
—	—	400(4.0)	120(1.2)	with				
—	—	280(2.8)	100(1.0)					
Reverse Action		40 ~ 200(0.4 ~ 2.0)			240(2.4)	40(0.4)	with	
		—	60 ~ 220(0.6 ~ 2.2)		280(2.8)	60(0.6)		
		80 ~ 200(0.8 ~ 2.0)	80 ~ 240(0.8 ~ 2.4)		280(2.8)	80(0.8)		
		—	100 ~ 220(1.0 ~ 2.2)	280(2.8)	100(1.0)			
		—	—	400(4.0)	120(1.2)			

- [Notes] (1) Spring Range 120 ~ 280kPaG is available for actuator size N33S and N40.
 (2) Off-balance 100kPaG(1.0kgf/cm²G) is applied only to direct action for the actuator size N24, N28, N33S and N40.

2 Limit of Operating Δ P at intermediate opening

State of Fluid	Port Size 20 mm and less	Port Size 25 mm ~ 200 mm
GAS, STEAM	Less than Δ P 6.0MPa	Less than Δ P 2.5MPa
LIQ. (NO CAVITATION OR FLASHING)		Less than Δ P 1.5MPa

[Note] It is recommended to select Model # 89 cage valves for the services bigger than above Δ P.

3 Allowable Shut-off Pressure

■ Metal Seat · Contoured Plug (See p.8 [Note(5)])

Unit : MPa(kgf/cm²)

Port Size		≤ 6(mm)	7	8	10	15	20	25	32	40	50	65	80	100	125	150	200
Actuator size	Off-balance	≤ 1/8 (in.)	3/16	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	6	8
N24	20 (0.2)	6.96 (71)		4.65 (47.5)	3.10 (31.7)	1.88 (19.2)	1.019 (10.4)	0.69 (7.1)	0.47 (4.8)	0.34 (3.5)	0.20 (2.1)						
	40 (0.4)	9.80 (100)		9.21 (94)	6.17 (63)	3.76 (38.4)	2.04 (20.9)	1.39 (14.2)	0.95 (9.7)	0.69 (7.1)	0.41 (4.2)						
	80 (0.8)			9.80 (100)	7.45 (76)	4.10 (41.9)	2.78 (28.4)	1.90 (19.4)	1.39 (14.2)	0.83 (8.5)							
	100 (1.0)			9.80 (100)	9.41 (96)	5.09 (52)	3.48 (35.5)	2.38 (24.3)	1.74 (17.8)	1.04 (10.7)							
N28	20 (0.2)	9.02 (92)		5.98 (61)	4.03 (41.1)	2.44 (24.9)	1.33 (13.6)	0.90 (9.2)	0.62 (6.3)	0.45 (4.6)	0.26 (2.7)	0.16 (1.7)	0.11 (1.2)	0.06 (0.7)			
	40 (0.4)	9.80 (100)		8.04 (82)	4.88 (49.8)	2.66 (27.2)	1.80 (18.4)	1.23 (12.6)	0.90 (9.2)	0.53 (5.5)	0.34 (3.5)	0.24 (2.5)	0.13 (1.4)				
	80 (0.8)			9.80 (100)	5.29 (54)	3.59 (36.7)	2.46 (25.2)	1.80 (18.4)	1.07 (11.0)	0.68 (7.0)	0.49 (5.0)	0.28 (2.9)					
	100 (1.0)			9.80 (100)	6.66 (68)	4.52 (46.1)	3.08 (31.5)	2.26 (23.1)	1.35 (13.8)	0.86 (8.8)	0.61 (6.3)	0.35 (3.6)					
N33S	20 (0.2)	9.80 (100)		5.88 (60)	3.58 (36.6)	1.96 (20.0)	1.32 (13.5)	0.90 (9.2)	0.66 (6.8)	0.39 (4.0)	0.24 (2.5)	0.17 (1.8)	0.09 (1.0)				
	40 (0.4)			7.15 (73)	3.92 (40.0)	2.65 (27.1)	1.81 (18.5)	1.33 (13.6)	0.79 (8.1)	0.50 (5.1)	0.36 (3.7)	0.20 (2.1)					
	80 (0.8)			9.80 (100)	7.84 (80)	5.29 (54)	3.63 (37.1)	2.66 (27.2)	1.59 (16.3)	1.01 (10.3)	0.72 (7.4)	0.42 (4.3)					
	100 (1.0)			9.80 (100)	6.57 (67)	4.54 (46.4)	3.33 (34.0)	2.00 (20.4)	1.26 (12.9)	0.91 (9.3)	0.52 (5.4)						
	120 (1.2)			9.80 (100)	7.94 (81)	5.39 (55)	4.00 (40.8)	2.39 (24.4)	1.52 (15.5)	1.09 (11.2)	0.63 (6.5)						
N40	20 (0.2)								1.27 (13.0)	0.93 (9.5)	0.55 (5.7)	0.35 (3.6)	0.25 (2.6)	0.14 (1.5)	0.08 (0.9)	0.05 (0.6)	0.03 (0.4)
	40 (0.4)								2.55 (26.1)	1.87 (19.1)	1.11 (11.4)	0.71 (7.3)	0.509 (5.2)	0.29 (3.0)	0.18 (1.9)	0.12 (1.3)	0.07 (0.8)
	80 (0.8)								5.09 (52)	3.74 (38.2)	2.24 (22.9)	1.43 (14.6)	1.02 (10.5)	0.59 (6.1)	0.38 (3.9)	0.26 (2.7)	[0.15] [(1.6)]
	100 (1.0)								6.37 (65)	4.68 (47.8)	2.81 (28.7)	1.78 (18.2)	1.28 (13.1)	0.74 (7.6)	0.48 (4.9)	0.33 (3.4)	0.19 (2.0)
	120 (1.2)								7.64 (78)	5.58 (57)	3.37 (34.4)	2.14 (21.9)	1.53 (15.7)	0.89 (9.1)	0.57 (5.9)	0.40 (4.1)	0.23 (2.4)
500	20 (0.2)								2.13 (21.8)	1.55 (15.9)	0.93 (9.5)	0.59 (6.1)	0.42 (4.3)	0.24 (2.5)	0.15 (1.6)	0.10 (1.1)	0.05 (0.6)
	40 (0.4)								4.27 (43.6)	3.12 (31.9)	1.87 (19.1)	1.19 (12.2)	0.85 (8.7)	0.49 (5.0)	0.32 (3.3)	0.22 (2.3)	0.12 (1.3)
	60 (0.6)								6.37 (65)	4.69 (47.9)	2.81 (28.7)	1.79 (18.3)	1.28 (13.1)	0.74 (7.6)	0.48 (4.9)	0.33 (3.4)	0.19 (2.0)
	80 (0.8)								8.53 (87)	6.17 (63)	3.75 (38.3)	2.39 (24.4)	1.71 (17.5)	0.99 (10.1)	0.64 (6.6)	0.45 (4.6)	0.26 (2.7)
	100 (1.0)								9.80 (100)	7.74 (79)	4.69 (47.9)	2.99 (30.5)	2.14 (21.9)	1.24 (12.7)	0.81 (8.3)	0.56 (5.8)	0.33 (3.4)
650	40 (0.4)												1.49 (15.2)	0.86 (8.8)	0.55 (5.7)	0.39 (4.0)	0.23 (2.4)
	60 (0.6)												2.23 (22.8)	1.29 (13.2)	0.84 (8.6)	0.58 (6.0)	0.35 (3.6)
	80 (0.8)												2.98 (30.4)	1.72 (17.6)	1.12 (11.5)	0.78 (8.0)	0.47 (4.8)
	100 (1.0)												3.73 (38.1)	2.15 (22)	1.41 (14.4)	0.98 (10)	0.58 (6.0)

■ Metal Seat · Quick Opening

Unit : MPa(kgf/cm²)

Port Size		8(mm)	10	15	20	25	32	40	50	65	80	100	125	150	200	
Actuator size	Off-balance	1/4 (in.)	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	6	8	
N24	40 (0.4)	7.74 (79)	5.09 (52)	3.17 (32.0)	1.70 (17.4)	1.15 (11.8)	0.79 (8.1)	0.57 (5.9)	0.34 (3.5)							
	80 (0.8)	9.80 (100)	6.27 (64)	3.42 (34.9)	2.32 (23.7)	1.58 (16.2)	1.15 (11.8)	0.69 (7.1)								
	100 (1.0)		7.84 (80)	4.28 (43.7)	2.90 (29.6)	1.98 (20.3)	1.45 (14.8)	0.87 (8.9)								
N28	40 (0.4)	9.80 (100)	6.66 (68)	4.06 (41.5)	2.21 (22.6)	1.50 (15.3)	0.99 (10.5)	0.75 (7.7)	0.45 (4.6)	0.28 (2.9)	0.20 (2.1)	0.11 (1.2)				
	80 (0.8)		8.13 (83)	4.44 (45.3)	3.01 (30.7)	2.06 (21.0)	1.50 (15.4)	0.90 (9.2)	0.56 (5.8)	0.41 (4.2)	0.23 (2.4)					
	100 (1.0)		9.80 (100)	5.58 (57)	3.76 (38.4)	2.57 (26.3)	1.68 (17.2)	1.12 (11.5)	0.71 (7.3)	0.509 (5.2)	0.29 (3.0)					
N33S	40 (0.4)	9.80 (100)	5.98 (61)	3.26 (33.3)	2.21 (22.6)	1.50 (15.4)	1.10 (11.3)	0.66 (6.8)	0.42 (4.3)	0.30 (3.1)	0.17 (1.8)					
	80 (0.8)		6.47 (66)	4.43 (45.2)	3.02 (30.9)	2.21 (22.6)	1.33 (13.6)	0.84 (8.6)	0.60 (6.2)	0.35 (3.6)						
	100 (1.0)		9.80 (100)	8.13 (83)	5.49 (56)	3.79 (38.7)	2.77 (28.3)	1.66 (17.0)	1.05 (10.8)	0.75 (7.7)	0.44 (4.5)					
	120 (1.2)		9.80 (100)	6.57 (67)	4.55 (46.4)	3.33 (34)	2.00 (20.4)	1.26 (12.9)	0.91 (9.3)	0.52 (5.4)						
N40	40 (0.4)						2.13 (21.0)	1.55 (15.9)	0.93 (9.5)	0.58 (6.0)	0.42 (4.3)	0.24 (2.5)	0.15 (1.6)	0.10 (1.1)	0.05 (0.6)	
	80 (0.8)						4.27 (43.6)	3.12 (31.9)	1.86 (19.0)	1.18 (12.1)	0.85 (8.7)	0.49 (5.0)	0.32 (3.3)	0.22 (2.3)	[0.12] (1.3)	
	100 (1.0)						5.29 (54)	3.90 (39.8)	2.34 (23.9)	1.49 (15.2)	1.06 (10.9)	0.61 (6.3)	0.40 (4.1)	0.28 (2.9)	0.16 (1.7)	
	120 (1.2)						6.37 (65)	4.68 (47.8)	2.81 (28.7)	1.78 (18.2)	1.28 (13.1)	0.74 (7.6)	0.48 (4.9)	0.33 (3.4)	0.19 (2.0)	
500	40 (0.4)						3.56 (36.4)	2.60 (26.6)	1.55 (15.9)	0.99 (10.1)	0.71 (7.3)	0.41 (4.2)	0.26 (2.7)	0.18 (1.9)	0.10 (1.1)	
	60 (0.6)						5.29 (54)	3.91 (39.9)	2.34 (23.9)	1.49 (15.2)	1.06 (10.9)	0.61 (6.3)	0.40 (4.1)	0.28 (2.9)	0.16 (1.7)	
	80 (0.8)						7.06 (72)	5.19 (53)	3.12 (31.9)	1.99 (20.3)	1.43 (14.6)	0.82 (8.4)	0.53 (5.5)	0.37 (3.8)	0.22 (2.3)	
	100 (1.0)						8.92 (91)	6.47 (66)	3.91 (39.9)	2.49 (25.4)	1.78 (18.2)	1.03 (10.6)	0.67 (6.9)	0.47 (4.8)	0.27 (2.8)	
650	40 (0.4)											1.24 (12.7)	0.71 (7.3)	0.47 (4.8)	0.32 (3.3)	0.19 (2.0)
	60 (0.6)											1.86 (19.0)	1.07 (11.0)	0.70 (7.2)	0.49 (5.0)	0.29 (3.0)
	80 (0.8)											2.49 (25.4)	1.44 (14.7)	0.94 (9.6)	0.65 (6.7)	0.39 (4.0)
100 (1.0)											3.10 (31.7)	1.80 (18.4)	1.17 (12)	0.82 (8.4)	0.49 (5.0)	

■ Soft Seat(PTFE)

Unit : MPa(kgf/cm²)

Port Size		4~8(mm)	10	15	20	25	32	40	50	65	80	100	125	150	200
Actuator size	Off-balance	≤1/4(in.)	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	6	8
N24	40(0.4)	—	—	1.71(17.5)	1.16(11.9)	0.85(8.7)	0.59(6.0)	0.45(4.6)	0.29(3.0)						
	80(0.8)	—	—	—	—	—	1.18(12.1)	0.91(9.3)	0.58(6.0)						
	100(1.0)	—	—	—	—	—	1.47(15.1)	1.13(11.6)	0.73(7.5)						
N28	20(0.2)	—	1.71(17.5)	1.22(12.5)	0.75(7.7)	0.54(5.6)	0.38(3.9)	0.29(3.0)	0.18(1.9)	0.12(1.3)	0.08(0.9)	0.05(0.6)			
	40(0.4)	—	—	—	1.52(15.5)	1.10(11.3)	0.76(7.8)	0.58(6.0)	0.38(3.9)	0.25(2.6)	0.18(1.9)	0.11(1.2)			
	80(0.8)	—	—	—	—	—	1.53(15.7)	1.18(12.1)	0.76(7.8)	0.51(5.3)	0.38(3.9)	0.23(2.4)			
N33S	100(1.0)	—	—	—	—	—	—	—	0.96(9.8)	0.64(6.6)	0.48(4.9)	0.29(3.0)			
	20(0.2)			1.71(17.5)	1.11(11.4)	0.81(8.3)	0.56(5.7)	0.43(4.4)	0.27(2.8)	0.18(1.9)	0.13(1.4)	0.07(0.8)			
	40(0.4)			—	—	1.62(16.6)	1.12(11.5)	0.87(8.9)	0.55(5.7)	0.38(3.9)	0.28(2.9)	0.16(1.7)			
	80(0.8)			—	—	—	—	—	1.12(11.5)	0.76(7.8)	0.56(5.8)	0.34(3.5)			
N40	100(1.0)			—	—	—	—	—	—	0.95(9.7)	0.70(7.2)	0.43(4.4)			
	120(1.2)			—	—	—	—	—	—	—	0.85(8.7)	0.51(5.3)			
	20(0.2)						0.79(8.1)	0.60(6.2)	0.39(4.0)	0.26(2.7)	0.19(2.0)	0.11(1.2)	0.07(0.8)	0.05(0.6)	0.02(0.3)
	40(0.4)						—	1.22(12.5)	0.79(8.1)	0.52(5.4)	0.40(4.1)	0.24(2.5)	0.15(1.6)	0.11(1.2)	0.06(0.7)
500	80(0.8)						—	—	—	—	0.80(8.2)	0.49(5.0)	0.32(3.3)	0.23(2.4)	0.13(1.4)
	100(1.0)						—	—	—	—	—	0.60(6.2)	0.41(4.2)	0.29(3.0)	0.17(1.8)
	120(1.2)						—	—	—	—	—	0.73(7.5)	0.49(5.0)	0.35(3.6)	0.21(2.2)
	40(0.4)									—	0.66(6.8)	0.40(4.1)	0.27(2.8)	0.19(2.0)	0.11(1.2)
650	60(0.6)									—	—	0.60(6.2)	0.41(4.2)	0.29(3.0)	0.17(1.8)
	80(0.8)									—	—	—	0.54(5.6)	0.39(4.0)	0.23(2.4)
	100(1.0)									—	—	—	—	0.50(5.1)	0.29(3.0)
650	40(0.4)												0.48(4.9)	0.34(3.5)	0.20(2.1)
	60(0.6)												—	0.51(5.3)	0.31(3.2)
	80(0.8)												—	—	0.41(4.2)
100(1.0)												—	—	—	

■ Soft Seat(GL-PTFE)

Unit : MPa(kgf/cm²)

Port Size		4~8(mm)	10	15	20	25	32	40	50	65	80	100	125	150	200
Actuator size	Off-balance	≤1/4(in.)	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	6	8
N24	40(0.4)	—	—	1.89(19.3)	1.16(11.9)	0.85(8.7)	0.59(6.0)	0.45(4.6)	0.29(3.0)						
	80(0.8)	—	—	—	—	1.70(17.4)	1.18(12.1)	0.91(9.3)	0.58(6.0)						
	100(1.0)	—	—	—	—	—	1.47(15.1)	1.13(11.6)	0.73(7.5)						
N28	20(0.2)	—	1.79(18.3)	1.22(12.5)	0.75(7.7)	0.54(5.6)	0.38(3.9)	0.29(3.0)	0.18(1.9)	0.12(1.3)	0.08(0.9)	0.05(0.6)			
	40(0.4)	—	—	—	1.52(15.5)	1.10(11.3)	0.76(7.8)	0.58(6.0)	0.38(3.9)	0.25(2.6)	0.18(1.9)	0.11(1.2)			
	80(0.8)	—	—	—	—	—	1.53(15.7)	1.18(12.1)	0.76(7.8)	0.51(5.3)	0.38(3.9)	0.23(2.4)			
N33S	100(1.0)	—	—	—	—	—	—	—	0.96(9.8)	0.64(6.6)	0.48(4.9)	0.29(3.0)			
	20(0.2)			1.80(18.4)	1.11(11.4)	0.81(8.3)	0.56(5.7)	0.43(4.4)	0.27(2.8)	0.18(1.9)	0.13(1.4)	0.07(0.8)			
	40(0.4)			—	—	1.62(16.6)	1.12(11.5)	0.87(8.9)	0.55(5.7)	0.38(3.9)	0.28(2.9)	0.16(1.7)			
	80(0.8)			—	—	—	—	—	1.12(11.5)	0.76(7.8)	0.56(5.8)	0.34(3.5)			
N40	100(1.0)			—	—	—	—	—	—	0.95(9.7)	0.70(7.2)	0.43(4.4)			
	120(1.2)			—	—	—	—	—	—	—	0.85(8.7)	0.51(5.3)			
	20(0.2)						0.79(8.1)	0.60(6.2)	0.39(4.0)	0.26(2.7)	0.19(2.0)	0.11(1.2)	0.07(0.8)	0.05(0.6)	0.02(0.3)
	40(0.4)						1.58(16.2)	1.22(12.5)	0.79(8.1)	0.52(5.4)	0.40(4.1)	0.24(2.5)	0.15(1.6)	0.11(1.2)	0.06(0.7)
500	80(0.8)						—	—	—	1.06(10.9)	0.80(8.2)	0.49(5.0)	0.32(3.3)	0.23(2.4)	0.13(1.4)
	100(1.0)						—	—	—	—	1.00(10.2)	0.60(6.2)	0.41(4.2)	0.29(3.0)	0.17(1.8)
	120(1.2)						—	—	—	—	—	0.73(7.5)	0.49(5.0)	0.35(3.6)	0.21(2.2)
	40(0.4)								1.32(13.5)	0.89(9.1)	0.66(6.8)	0.40(4.1)	0.27(2.8)	0.19(2.0)	0.11(1.2)
650	60(0.6)								—	—	1.00(10.2)	0.60(6.2)	0.41(4.2)	0.29(3.0)	0.17(1.8)
	80(0.8)								—	—	—	0.81(8.3)	0.54(5.6)	0.39(4.0)	0.23(2.4)
	100(1.0)								—	—	—	—	—	0.50(5.1)	0.29(3.0)
650	40(0.4)											0.70(7.2)	0.48(4.9)	0.34(3.5)	0.20(2.1)
	60(0.6)											—	—	0.51(5.3)	0.31(3.2)
	80(0.8)											—	—	—	0.41(4.2)
100(1.0)											—	—	—	0.51(5.3)	

■ Soft Seat(PCTFE)

Unit : MPa(kgf/cm²)

Port Size	Off-balance	4~8(mm)	10	15	20	25	32	40	50	65	80	100	125	150	200	
		≤1/4(in.)	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	6	8	
N24	40(0.4)	2.45(25.0)	2.45(25.0)	1.89(19.3)	1.16(11.9)	0.85(8.7)	0.59(6.0)	0.45(4.6)	0.29(3.0)							
	80(0.8)	-		2.34(23.9)	1.70(17.4)	1.18(12.1)	0.91(9.3)	0.58(6.0)								
	100(1.0)	-		2.45(25.0)	2.13(21.8)	1.47(15.1)	1.13(11.6)	0.73(7.5)								
N28	20(0.2)	2.28(23.3)	1.79(18.3)	1.22(12.5)	0.75(7.7)	0.54(5.6)	0.38(3.9)	0.29(3.0)	0.18(1.9)	0.12(1.3)	0.08(0.9)	0.05(0.6)				
	40(0.4)	2.45(25.0)	2.45(25.0)	2.45(25.0)	1.52(15.5)	1.10(11.3)	0.76(7.8)	0.58(6.0)	0.38(3.9)	0.25(2.6)	0.18(1.9)	0.11(1.2)				
	80(0.8)	-			2.21(22.6)	1.53(15.7)	1.18(12.1)	0.76(7.8)	0.51(5.3)	0.38(3.9)	0.23(2.4)					
100(1.0)	-	2.45(25.0)			1.92(19.6)	1.48(15.1)	0.96(9.8)	0.64(6.6)	0.48(4.9)	0.29(3.0)						
N33S	20(0.2)			1.80(18.4)	1.11(11.4)	0.81(8.3)	0.56(5.7)	0.43(4.4)	0.27(2.8)	0.18(1.9)	0.13(1.4)	0.07(0.8)				
	40(0.4)			2.45(25.0)	2.23(22.8)	1.62(16.6)	1.12(11.5)	0.87(8.9)	0.55(5.7)	0.38(3.9)	0.28(2.9)	0.16(1.7)				
	80(0.8)		2.26(23.1)		1.74(17.8)	1.12(11.5)	0.76(7.8)	0.56(5.8)	0.34(3.5)							
	100(1.0)		2.45(25.0)		2.18(22.3)	1.41(14.4)	0.95(9.7)	0.70(7.2)	0.43(4.4)							
	120(1.2)		-			2.45(25.0)	2.18(22.3)	1.41(14.4)	0.95(9.7)	0.70(7.2)	0.43(4.4)					
N40	20(0.2)						0.79(8.1)	0.60(6.2)	0.39(4.0)	0.26(2.7)	0.19(2.0)	0.11(1.2)	0.07(0.8)	0.05(0.6)	0.02(0.3)	
	40(0.4)						1.58(16.2)	1.22(12.5)	0.79(8.1)	0.52(5.4)	0.40(4.1)	0.24(2.5)	0.15(1.6)	0.11(1.2)	0.06(0.7)	
	80(0.8)								1.58(16.2)	1.06(10.9)	0.80(8.2)	0.49(5.0)	0.32(3.3)	0.23(2.4)	0.13(1.4)	
	100(1.0)								2.45(25.0)	1.99(20.3)	1.34(13.7)	1.00(10.2)	0.60(6.2)	0.41(4.2)	0.29(3.0)	0.17(1.8)
	120(1.2)								2.39(24.4)	1.60(16.4)	1.20(12.3)	0.73(7.5)	0.49(5.0)	0.35(3.6)	0.21(2.2)	
500	40(0.4)						2.45(25.0)	2.04(20.9)	1.32(13.5)	0.89(9.1)	0.66(6.8)	0.40(4.1)	0.27(2.8)	0.19(2.0)	0.11(1.2)	
	60(0.6)								1.99(20.3)	1.34(13.7)	1.00(10.2)	0.60(6.2)	0.41(4.2)	0.29(3.0)	0.17(1.8)	
	80(0.8)								2.45(25.0)	1.79(18.3)	1.33(13.6)	0.81(8.3)	0.54(5.6)	0.39(4.0)	0.23(2.4)	
	100(1.0)								2.24(22.9)	1.67(17.1)	1.01(10.4)	0.68(7.0)	0.50(5.1)	0.29(3.0)		
650	40(0.4)										1.15(11.8)	0.70(7.2)	0.48(4.9)	0.34(3.5)	0.20(2.1)	
	60(0.6)										1.74(17.8)	1.05(10.8)	0.71(7.3)	0.51(5.3)	0.31(3.2)	
	80(0.8)										2.32(23.7)	1.42(14.5)	0.96(9.8)	0.68(7.0)	0.41(4.2)	
	100(1.0)										2.45(25.0)	1.77(18.1)	1.19(12.2)	0.86(8.8)	0.51(5.3)	

- [Notes] (1) Thick frame represents standard combination of body size at full port and actuator size.
 (2) Unit of off-balance is kPaG(kgf/cm²G)
 (3) Off-balance 100kPaG(1.0kgf/cm²G) is applied only to direct action for the actuator size N24, N28, N33S and N40.
 (4) This table shows available shut-off pressure only for combination with standard gland packing(PTFE V-ring)
 (5) If TSO(Tight Shut-Off) is required for contoured plug, available shut-off pressure must be obtained with multiplying the value in the column by 1/1.2(only applicable to metal-seat). For ANSI Class V requirement, multiply 1/1.5.
 (6) PCTFE is used for resilient seat material of port size 3/8 inch(10mm) and under.
 (7) In case N33S or N40 of actuator size with Off-balance 120kPaG(1.2kgf/cm²G), oil free or bellow seal bonnet or special gland packing shall not be applied.
 (8) When port size 8 inch(200mm), actuator size N40 and Off-balance 80kPaG(0.8kgf/cm²G), above shut-off pressure table is not applicable for reverse action valve with 65mm rated travel.

6. MAIN DIMENSIONS AND MASSES

1 Face-to-face Dimensions of Valve Body

Unit : mm

Press. Rating		Face-to-face Dimension F				
Valve Size (mm)	(in.)	JIS 10K RF	JIS 20K RF	JIS 30K 40KRF	ANSI 600 RJ	SW(≤ 50 mm) BW(≥ 65 mm)
		ANSI 150 RF	ANSI 300 RF	ANSI 300 RJ ANSI 600 RF		
15	1/2		190		203	
20	3/4	184	194		206	206
25	1	184	197		210	220
40	1 1/2	222	235		251	270
50	2	254	267	286	289	320
65	2 1/2	276	292	311	314	380
80	3	298	317	337	340	430
100	4	352	368	394	397	490
125	5	403	425	457	460	580
150	6	451	473	508	511	630
200	8	543	568	610	613	800

- [Notes] (1) Face-to-Face dimension in hatched zone conform to IEC 534-3(JIS B2002) and ISA-S75.03.
 (2) Face-to-Face dimension of male and female, tongue and groove flange for JIS 10K-30K(ANSI 150, ANSI 300) is coincident with JIS30K RF.

2 Standard Dimensions

Unit : mm

Valve Size		Actuator Size	D	E	Plain Bonnet Type		Extension Bonnet Type				Bellows Seal Bonnet Type				C _R	
(mm)	(in.)				G	C	Type-F		Type-H		BA20K		BA40K			
							G	C	G	C	G	C	G	C		
15	1/2	N24	240	56/65	133	430	530	233	696	993	366	663	693	C+25		
		N28	280			469	569					1032	702		732	
		N33S	330			524	624					1087	757		787	
20	3/4	N24	240	63/65	133	430	530	233	696	993	366	663	693	C+25		
		N28	280			469	569					1032	702		732	
		N33S	330			524	624					1087	757		787	
25	1	N24	240	70/65	136	433	533	236	699	996	369	666	696	C+25		
		N28	280			477	572					1035	705		735	
		N33S	330			527	627					1090	760		790	
40	1 1/2	N24	240	83	152	449	599	302	715	1012	400	697	739	C+25		
		N28	280			488	638					1051	736		778	
		N33S	330			453	693					1106	791		833	
		N40	400		696	846	1259	1015	1057	C+160						
		500S	500		915	1065	1478	1234	1276							
50	2	N24	240	95	171	468	618	321	734	1031	442	739	793	C+25		
		N28	280			507	657					1070	778		832	
		N33S	330			562	712					1125	833		887	
		N40	400		715	865	1315	1039	1091	C+160						
		500S	500		934	1084	1534	1258	1310							
65	2 1/2	N28	280	106	217	553	703	367	752	1088	549	885	900	C+25		
		N33S	330			608	758					1143	940		1015	
		N40	400		761	911	1361	1146	1219	C+160						
		500S	500		980	1130	1580	1365	1438							
80	3	N28	280	130	218	554	704	368	806	1142	550	886	961	C+25		
		N33S	330			609	759					1197	941		1016	
		N40	400			762	912					1387	1147		1220	
		500S	500		981	1131	1606	1366	1439	C+160						
		650S	650		1277	1427	1902	1673	1746							
100	4	N28	280	145	256	592	742	406	844	1180	588	924	999	C+25		
		N33S	330			647	797					1235	979		1054	
		N40	400			800	950					1425	1185		1258	
		500S	500		1019	1169	1644	1404	1477	C+160						
		650S	650		1315	1465	1940	1711	1784							
125	5	N40	400	180	313	828	978	463	938	1453	759	1274	1382	C+25		
		500S	500			1047	1197					1672	1493		1601	
		650S	650			1343	1493					1968	1794		1899	C+250
		N40	400			856	1006					1481	1302		1410	
150	6	500S	500	205	341	1075	1225	491	966	1700	787	1521	1629	C+160		
		650S	650			1371	1521					1966	1822		1930	
		N40	400			962	1112					1664	1534		1679	
200	8	500S	500	225	447	1181	1331	597	1149	1883	1019	1753	1898	C+160		
		650S	650			1477	1627					2179	2074		2219	
		N40	400			962	1112					1664	1534		1679	

- [Notes] (1) Dimension C represents actuator for direct action. For actuator of reverse action, use the dimension CR.
 (2) The dimensions G & C of bellows seal bonnet type represent that press. rating of bellows is 20K, or less. If the press. rating is 30K, 1 mm is to be added to dimensions G & C for actuator size N24-N33S. If the press. rating is 40K, the above table is not available.
 (3) Edimensions, Upper is for class 150 ~ 300, Lower is for class 400 ~ 600.

Plain Bonnet Type Actuator Size

N24 ~ N40

500, 650

Extension Bonnet Type Type-F, Type-H


N24 ~ N40

500, 650

Bellows Seal Bonnet Type (BA20K)

N24 ~ N40

500, 650

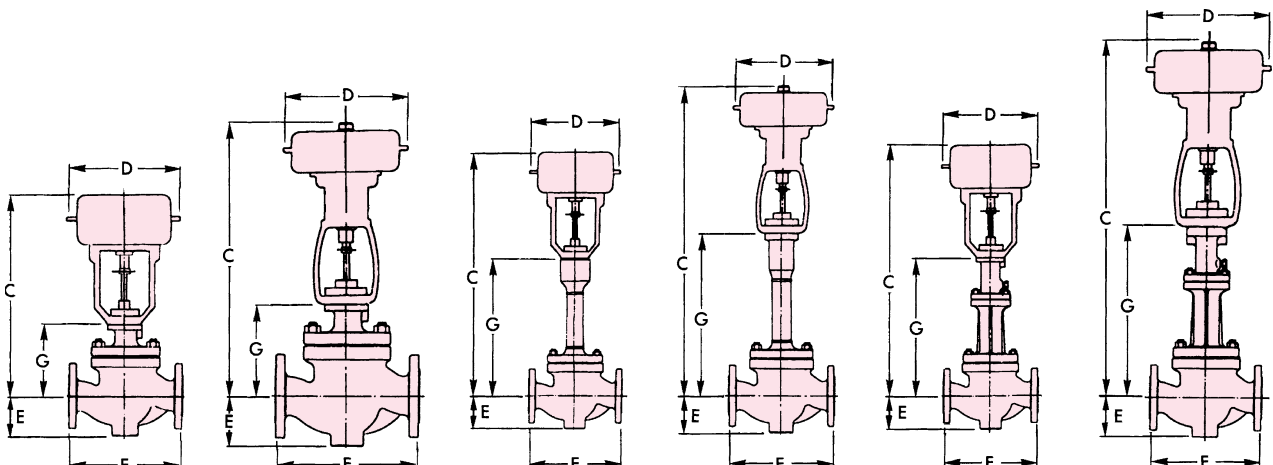

3 Weight

Following table shows approximate weight for valve body assembly completed with actuator except accessories. As to the weight not shown in this table, contact your nearest MOTOYAMA's sales office or agent in the region.

Unit : kg

Size	15 (mm)			20			25			40			50			65			80			100			125			150			200		
	1/2 (in.)			3/4			1			1 1/2			2			2 1/2			3			4			5			6			8		
	Rating	10K	20K	30K	10K	20K	30K	10K	20K	30K	10K	20K	30K	10K	20K	30K	10K	20K	30K	10K	20K	30K	10K	20K	30K	10K	20K	30K	10K	20K	30K		
Act. Size	ANSI 150	ANSI 300	ANSI 600	ANSI 150	ANSI 300	ANSI 600	ANSI 150	ANSI 300	ANSI 600	ANSI 150	ANSI 300	ANSI 600	ANSI 150	ANSI 300	ANSI 600	ANSI 150	ANSI 300	ANSI 600	ANSI 150	ANSI 300	ANSI 600	ANSI 150	ANSI 300	ANSI 600	ANSI 150	ANSI 300	ANSI 600	ANSI 150	ANSI 300	ANSI 600			
N24	22	22	24	23	23	24	24	24	26	31	32	33	38	38	41																		
N28	25	25	27	26	26	27	27	27	29	34	35	36	41	41	44	52	53	57	62	65	69	91	95	102									
N33S	34	34	36	35	35	36	36	36	38	43	44	45	50	50	53	61	62	66	71	74	78	100	104	111									
N40										75	76	78	83	83	86	94	95	99	104	107	111	134	138	145	163	170	180	224	233	248			
500SD										111	112	114	119	119	122	130	131	135	140	143	147	170	174	181	199	206	216	260	269	284			
650SD																		330	333	337	360	364	371	389	396	406	451	460	475				

7. JACKETED BODY (option)

Jacked valve body is most suitable for high viscous fluid service. The jacketed body is available for pressure rating JIS 30K and ANSI/JPI Class 300, or less. Only top mounted handwheel for 3800 actuator is available for jacketed body.

1 Full Jacket Type B


Where double pipe is used in piping, connection flange is two size larger than the valve size. In this design, full jacket is employed.

Standard Dimensions

Unit : mm

Valve size	Flange size	F	E	G				
				Actuator size				
				N24 N28 N33S	N40 500	650		
15	1/2	40	1 1/2	240	70	201		
20	3/4	40	1 1/2	240	70	201		
25	1	50	2	260	75	204		
40	1 1/2	65	2 1/2	320	100	226	262	
50	2	80	3	360	100	253	289	
65	2 1/2	100	4	380	110	280	316	
80	3	125	5	410	135	321	350	350
100	4	150	6	460	155	370	404	404
125	5	200	8	580	230		406	406
150	6	200	8	630	265		428	428
200	8	250	10	800	290		518	518

[Note] Face to face dimension "F" is available for JIS 10K RF, 20K RF, ANSI/JPI 150 RF and 300 RF Flange Rating.

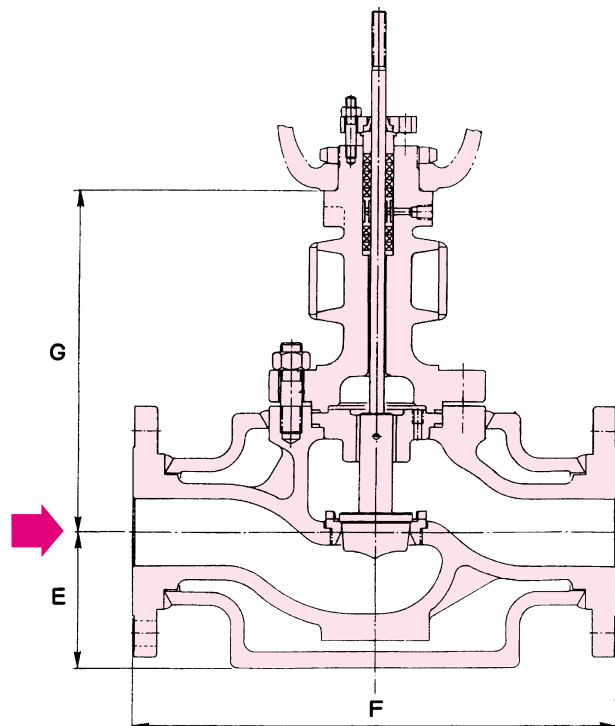


2 Semi-Jacket Type G

Semi-Jacket is employed if pipe flange size is equal to the valve size

Standard Dimensions Unit : mm

Valve size Flange size		F	E	G			
				Actuator size			
				N24 N28 N33S	N40 500	650	
(mm)	(in)						
15	1/2	240	70	201	—	—	
20	3/4	240	70	201	—	—	
25	1	260	75	204	—	—	
40	1 1/2	320	100	226	262	—	
50	2	360	100	253	289	—	
65	2 1/2	380	117	280	316	—	
80	3	410	142	321	350	350	
100	4	460	157	370	404	404	
125	5	580	230	—	406	406	
150	6	630	265	—	428	428	
200	8	800	290	—	518	518	


[Note] Face to face dimension "F" is available for JIS 10K RF, 20K RF, ANSI/JPI 150 RF and 300 RF Flange Rating.

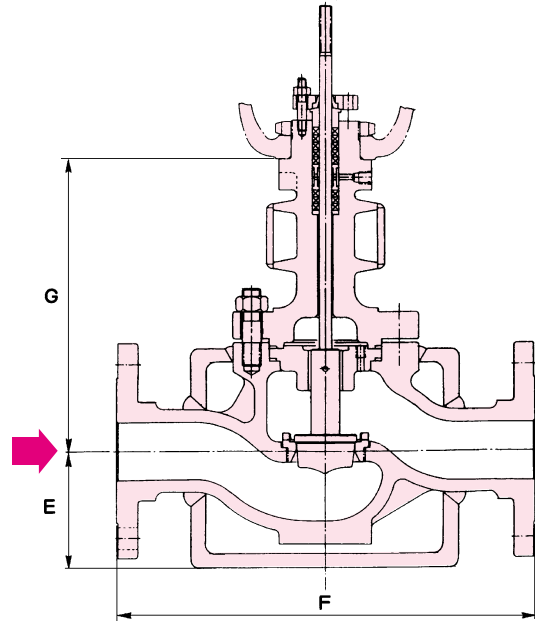

3 Piping Specifications

MOTOYAMA assemble the piping between the valve body and bonnet.
The standard connection to customer's jacket piping is as follows.

- (1) **Heating with Hot Water or Steam**
Inlet and Outlet Connection : Rc 1/2 Screwed
Piping on Valve : STPG 370, 15mm, JIS 10K RF
- (2) **Heating with Heating medium**
Inlet and Outlet Connection : Flange, JIS 20K, 15mm
Piping on Valve : STPG 370, 15mm, JIS 20K RF
- (3) **Option**
Inlet and Outlet Connection : 20mm Flange (JIS, ANSI, JPI)
Piping on Valve : 15mm Flange (JIS, ANSI, JPI)
10K, 20K, Class 150, 300,
Rc 3/4, NPT 1/2, NPT 3/4

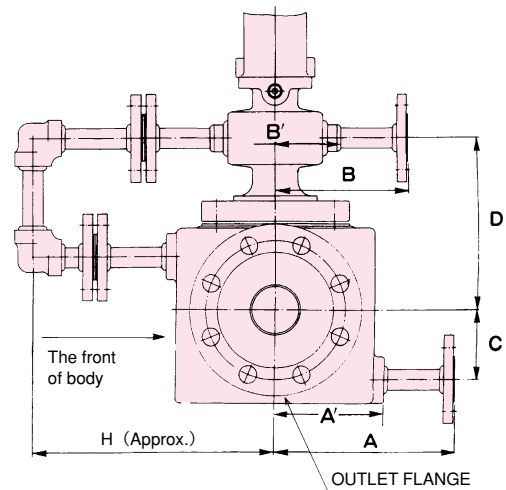


Dimensions

Unit : mm

Valve size		Type B, Type G (Common)										Type B			Type G		
(mm)	(in.)	B			C	D			B'			A	A'	H (Approx.)	A	A'	H (Approx.)
		Actuator size				Actuator size			Actuator size								
		N24 N28 N33S	N40 500	650		N24 N28 N33S	N40 500	650	N24 N28 N33S	N40 500	650						
15	1/2	144	—	—	45	145	—	—	66	—	—	162	84	230	162	84	230
20	3/4	144	—	—	45	145	—	—	66	—	—	162	84	230	162	84	230
25	1	144	—	—	50	148	—	—	66	—	—	162	84	230	162	84	230
40	1 1/2	144	176	—	75	159	177	—	66	98	—	176	98	250	188	110	260
50	2	144	176	—	75	186	204	—	66	98	—	196	118	270	203	125	280
65	2 1/2	144	176	—	85	213	235	—	66	98	—	202	124	280	227	149	300
80	3	151	176	176	110	252	270	272	72	98	98	223	145	300	253	175	330
100	4	163	176	201	125	299	324	326	85	98	123	239	161	310	271	193	340
125	5	—	201	201	170	—	328	328	—	123	123	271	193	340	271	193	340
150	6	—	201	201	195	—	350	350	—	123	123	322	244	390	322	244	390
200	8	—	239	239	215	—	430	430	—	162	162	372	292	440	372	292	440

8. MOUNTING ORIENTATIONS

Standard mounting orientations are as follows.

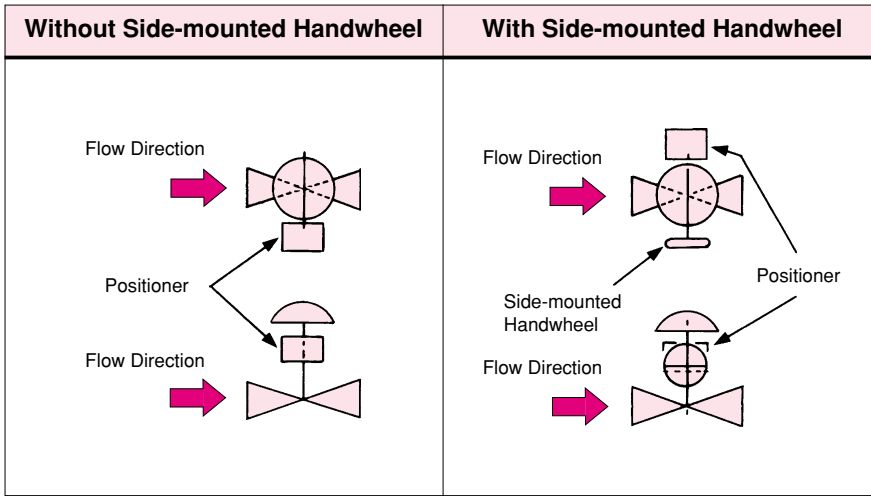



株式会社 **本山製作所**

MOTOYAMA ENG. WORKS, LTD.

http://www.motoyama-cp.co.jp

本 社 工 場 〒981-3697 宮城県黒川郡大衡村大衡字亀岡5-2 TEL(022)344-4511(代表) / FAX(022)344-4522
E-mail : info@motoyama-cp.co.jp

Main Office & Factory 5-2, Ohira Aza Kameoka, Ohira-mura, Kurokawa-gun, Miyagi, 981-3697, Japan
TEL +81-22-344-4511 / FAX +81-22-344-4522
E-mail : info-overseas@motoyama-cp.co.jp

●販売・サービスネットワーク

東 京 支 店	〒210-0007 神奈川県川崎市川崎区駅前本町 10-5 クリエ川崎 11F	TEL(044)381-8770(代表)	FAX(044)381-8772
大 阪 支 店	〒550-0014 大阪市西区北堀江 1 丁目 12-19 クリモビル 3F	TEL(06)6535-8111(代表)	FAX(06)6535-8655
国 際 営 業 部	〒210-0007 神奈川県川崎市川崎区駅前本町 10-5 クリエ川崎 11F	TEL(044)381-8771	FAX(044)381-8773
札 幌 営 業 所	〒001-0912 札幌市北区新琴似 12 条 7 丁目 1-47 リパティタウンP棟 101 号	TEL(011)766-1520	FAX(011)766-1521
東 北 営 業 所 大 衡 サービスセンター	〒981-3697 宮城県黒川郡大衡村大衡字亀岡 5-2	TEL(022)344-1761	FAX(022)344-1762
上 越 営 業 所 上 越 サービスセンター	〒942-0036 新潟県上越市大字東中島 2393 番地	TEL(025)542-5151	FAX(025)542-5152
関 東 営 業 所 千 葉 サービスセンター	〒290-0046 千葉県市原市岩崎西 1 丁目 5-19	TEL(0436)21-4400	FAX(0436)21-3540
静 岡 営 業 所	〒422-8033 静岡市駿河区登呂 2 丁目 10-13 ハイツ富士 1F	TEL(054)288-2237	FAX(054)288-2239
名 古 屋 営 業 所 中 部 サービスセンター	〒481-0012 愛知県北名古屋市久地野安田 36 番地	TEL(0568)26-6681	FAX(0568)26-6631
阪 神 サービスセンター	〒560-0894 大阪府豊中市勝部 2 丁目 18-3	TEL(06)6854-7511	FAX(06)6854-7512
徳 山 営 業 所 周 南 サービスセンター	〒745-0861 山口県周南市新地 1 丁目 6-11	TEL(0834)21-5012	FAX(0834)31-0450
四 国 営 業 所 新 居 浜 サービスセンター	〒792-0896 愛媛県新居浜市阿島 1 丁目 6-26	TEL(0897)47-8993	FAX(0897)47-8995
大 分 営 業 所 大 分 サービスセンター	〒870-0108 大分市大字三佐字山ノ神 980-1	TEL(097)527-3704	FAX(097)522-2352

●海外関連会社

本山 閩門(大連)有限公司 〒116601 中国 遼寧省大連市金州新区港興大街 39 号 14-7 TEL +86-411-6589-1277 FAX +86-411-6589-1278

●海外販売代理店

中国、韓国、台湾、シンガポール、インドネシア、マレーシア、サウジアラビア

●SALES AND SUPPORT NETWORK

Overseas Marketing & Sales Dept. : 11th Floor, Clie Kawasaki, 10-5, Ekimae-honcho, Kawasaki-ku, Kawasaki-city, Kanagawa, 210-0007 Japan
TEL: +81-44-381-8771 FAX : +81-44-381-8773
Domestic Sales Branches : Tokyo, Osaka, Sapporo, Tohoku, Joetsu, Kanto, Shizuoka, Nagoya, Hanshin, Tokuyama, Shikoku, Oita

●OVERSEAS AFFILIATED COMPANY

MOTOYAMA VALVE (DALIAN) CO., LTD
Gangxing Street 39-14-7, Jinzhou New District, Dalian-city, 116601 China TEL: +86-411-6589-1277 FAX: +86-411-6589-1278

●OVERSEAS NETWORK

China, Korea, Taiwan, Singapore, Indonesia, Malaysia, Saudi Arabia

◆当社は保証期間を原則として製品納入後 1 年としています。

◆The product will be warranted for one year after delivering this product in principle.

■本カタログの記載内容は、商品の改良等のため予告なく変更することがありますので予めご了承下さい。

■MOTOYAMA is continuously improving and upgrading its product design, specifications and/or dimensions. Information included herein is subject to change without notice.

■本カタログは正しい情報の提供を目的としたものであり、本製品の市場性または適合性の保証を証明するものではありません。

■This catalog is supplied for information purpose only and should not be considered certified marketability and conformability of this product.